



Protect Concrete Foundations from Water Intrusion



- Install in Any Weather (Rain, Snow or Sun)
- Quick and Easy Installation
- Minimizes Costly Call-Backs
- Does Not Emit Noxious or Hazardous Fumes
- No Expensive Spray Equipment Required

DMX
PLASTICS LIMITED

Toll free: 1-855-501-7837
www.dmxmembranes.com

CCMC 13169-R
CCMC 13182-R
ICC ESR-2896




Wall Waterproofing / Damproofing Foundation

MATERIAL

DMX uses a specially formulated High Density Polyethylene that provides a high environmental stress crack resistance to alkalines and acids found in the soil. Our special extrusion process utilizes low heat and low shear to prevent heat degradation in the final product. The use of antioxidants and lubricants further ensure a smooth, superior quality membrane that outperforms the competition.

PROPERTIES

DMX AG is an air gap membrane that exceeds today's most demanding building codes. DMX AG is completely waterproof. It bridges cracks in the foundation and drains away damaging moisture from the foundation. By controlling exterior moisture DMX AG virtually eliminates foundation leaks and expensive call backs. DMX AG has a wide operating range, it installs quickly with smartly designed accessories that help speed up installation. DMX AG is inert, so no special breathing apparatus or skin protection is required during installation.

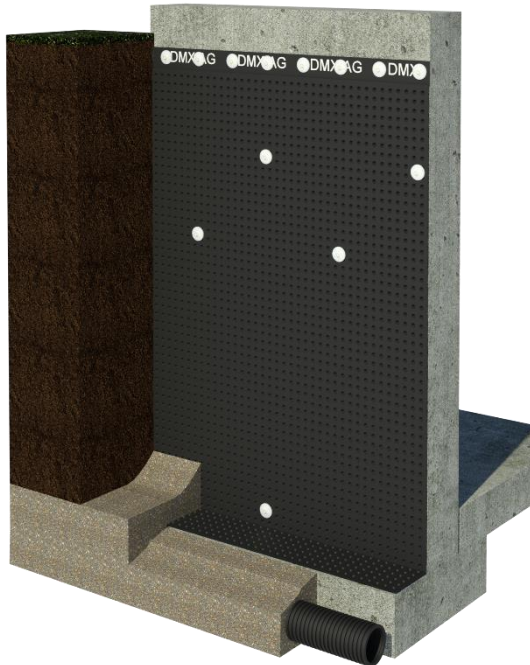

Technical Data

Product Name	DMX AG™
Colour	Black
Material	HDPE
Dimple Height	8mm
Compressive Strength	6,700 lbs/ft ² (320 kn/m ²)
Vapor Permeance	< 4grams/m ² /day
Temperature Range	-25 (°C) - +70 (°C)
Chemical Properties	Superior ESCR
Toxicity	Non-toxic
Weight per unit area	600gr/m ²
Roll sizes	1.22m x 20m (4' x 65'6") 1.53m x 20m (5' x 65'6") 1.65m x 20m (5'5" x 65'6") 1.85m x 20m (6' x 65'6") 1.98m x 20m (6'6" x 65'6") 2.13m x 20m (7' x 65'6") 2.44m x 20m (8' x 65'6") 2.74m x 20m (9' x 65'6") 3.05m x 20m (10' x 65'6")
Service life expectancy	> 50 years



165 Orenda Road, Brampton, Ontario L6W 1W3

Toll Free: 1-855-501-7837
www.dmxmembranes.com